



Universal Side and Top Print & Apply Labeling System

Features:


- State of the Art Design
- Universal construction for standardization of spare parts
- Side and Top Apply configurations
- Printed Circuit Board with L.E.D' s for easy trouble shooting
- Lift Stand Switch
- RS232 Connectivity
- Performance Printing with your choice of Sato or Datamax Print Engines
- Print speed up to 16 ips
- Direct Thermal or Thermal Transfer printing
- Photo-Eye controlled Label Take Up for reduced power consumption
- Quick change Pneumatic Panel for Blow, Single or Dual Tamp Applicator configurations
- Quick change Electronic and I/O panel

Options:

- Manual or Motorized Universal Lift Stand
- RS-485, Ethernet, USB connectivity
- Print Resolution of 203, 305 or 609 dpi

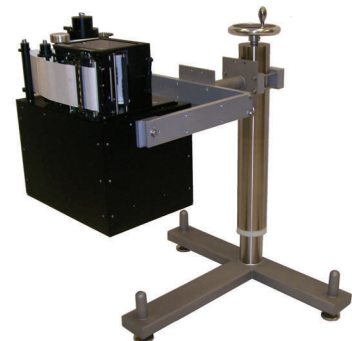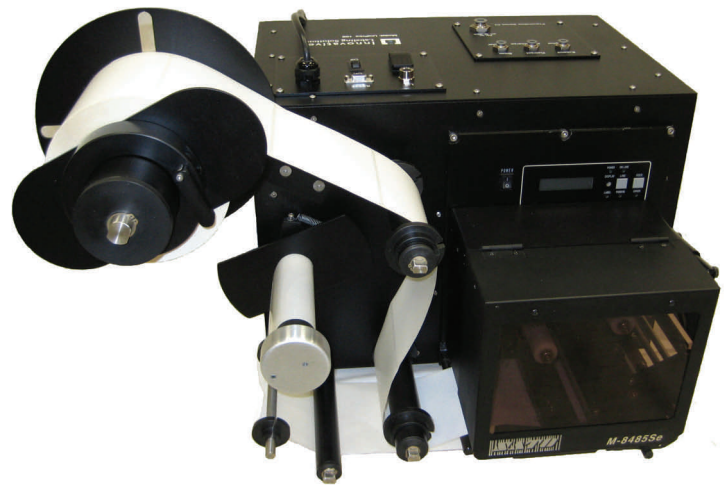

Side Apply Configuration

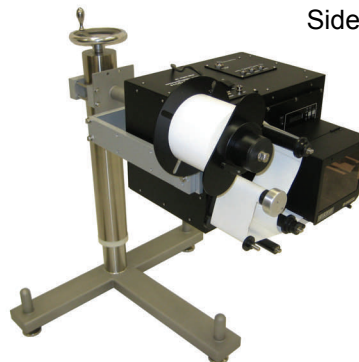

Top Apply Configuration